



INSTALLATION GUIDE

09-> B8 Audi A4, A5 2.0T Exhaust Systems

Congratulations on your purchase of the A.W.E. Tuning Front exhaust system for the 09-> Audi 2.0T. Exquisite build quality with industry leading performance distinguishes this exhaust system from all others. If installing a Dual Tip or Quad Tip system on a car that did not originally come with this version system, please visit our website for a list of factory parts necessary for vehicle conversion.

Contact us with any installation questions.

215 686 1670

awe-tuning.com

sales@awe-tuning.com

PARTS LIST

- 1 resonated midpipe (Part A)
- 1 connector tube (Single outlet only, Part B)
- 1 driver side rear muffler section (Part C)
- 1 Y-Pipe split (Dual and Quad Tip only, Part D)
- 1 driver side connector tube (Dual and Quad Tip only, Part E)
- 1 passenger side connector tube (Dual and Quad Tip only, Part F)
- 1 passenger side rear muffler section (Dual and Quad Tip Only, Part G)
- 2 63.5mm Accu-Seal clamp (Part H)
- 1 63.5mm Accu-Seal clamp (Dual and Quad Tip Only, Part H)
- 2 57.2mm Accu-Seal clamp (Dual and Quad Tip Only, Part I)
- 2 3.15" tip (Single and Quad Tip only, Part J)
- 2 2.25" T-bolt clamp (Single and Quad Tip only, Part K)
- 2 3.15" tip (Quad Tip only, Part J)
- 2 2.25" T-bolt clamp (Quad Tip only, Part K)
- 1 .50" Serrated hanger washer (Single outlet, Quad and Dual Tip, Part L)
- 1 .50" Serrated hanger washer (Dual and Quad Tip, Part L)
- 2 3.50" tip (Dual Tip only, not pictured)
- 2 3.12" T-bolt clamp (Dual Tip only, not pictured)


Optional Downpipe Parts List:

- 1 Downpipe section with flex joint
- 1 Cat to downpipe gasket
- 3 M8 x 30mm stainless bolt
- 3 M8 copper exhaust nut
- 6 M8 washer

Step 1

Remove stock exhaust components.

*****WARNING*** Do NOT unbolt passenger side hanger fastener at Arrow A in Figure 1 as it also attaches fuel tank to chassis. Remove driver side hanger at Arrow B and slide stock exhaust parts out of passenger side hanger.**

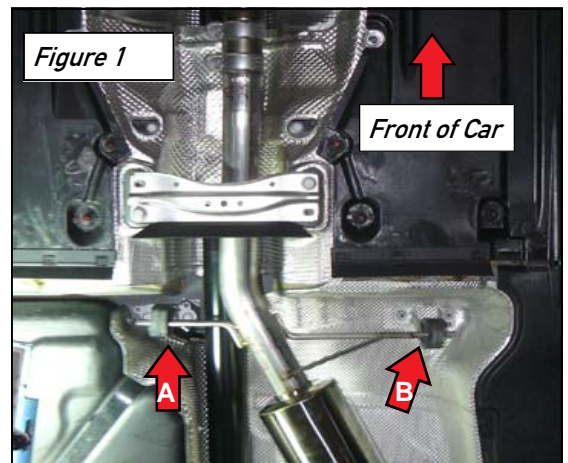

Step 2

Install A.W.E. Tuning exhaust parts as shown in **Figures 2 and 3** below. Refer to the Parts List on page 1. Note that there are several adjustment points on the A.W.E. exhaust to ensure proper fitment. Also note that the factory exhaust hangers are also adjustable with slotted bolt holes to allow further fine tuning.

Figure 2: Single Outlet Version


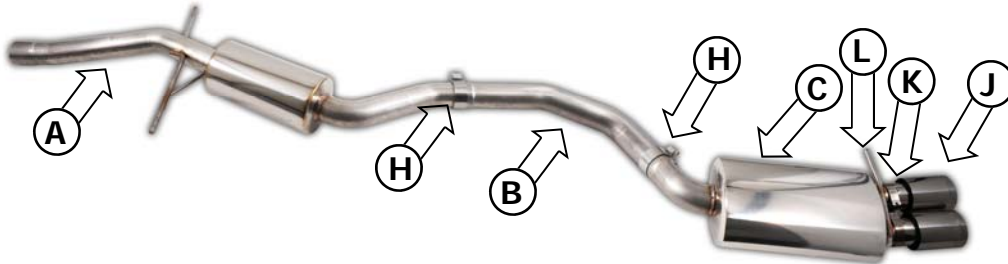


Figure 3: Dual and Quad Tip Versions

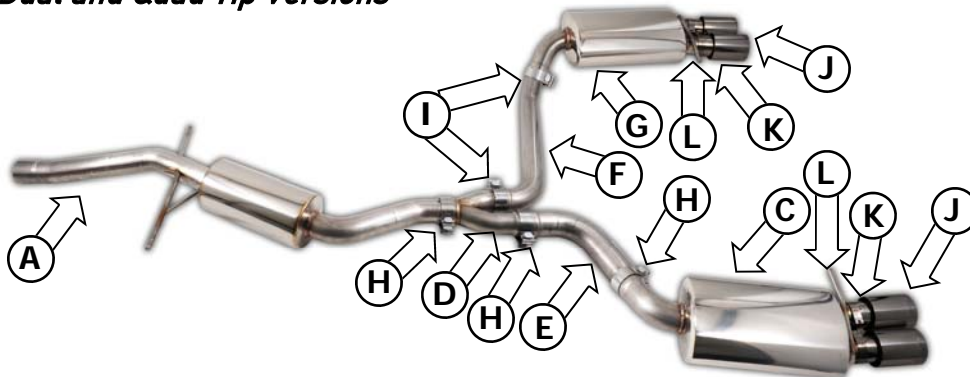

Step 3

Each rear tip is rotationally adjustable to ensure that the A.W.E. Tuning logo remains centered when the exhaust is installed, and also length adjustable to suit personal taste.

When adjusting the length of the tips, make sure that the tip and tailpipe of the muffler overlap at least the width of the clamp (arrow in Figure 4). *This overlap is very important to ensure that the clamp has enough surface area to tighten down to in order to keep the tip from falling off while driving!*

Tap a serrated washer (Part L) onto the end of each A.W.E. Tuning exhaust hanger post to keep the exhaust system from sliding out of the rubber hangers under cornering.

Before installing optional A.W.E. Tuning downpipe, soak all fasteners in a rust penetrant to prevent snapping. Re-use the factory sleeve clamp between downpipe and rest of exhaust system. Install using the enclosed fasteners.

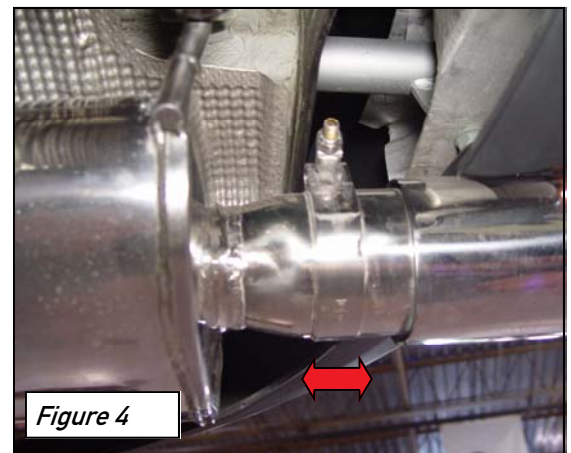


Figure 4

ENJOY

Your exhaust system requires no maintenance other than periodic cleaning of the tips for cosmetic appearance. Use a premium metal cleaner.

Please note that the exhaust volume and sound will settle with usage. Usually 800-1000 miles is required to fully break in a new exhaust system.



Any questions or comments,
please do not hesitate to contact us:

1-888-565-2257
awe-tuning.com
sales@awe-tuning.com



AWE Tuning
2385C Maryland Road
Willow Grove, PA 19090
215-658-1670
sales@awe-tuning.com

Thank you for choosing A.W.E. Tuning as your performance automotive parts supplier. Please remember that a performance car is only as strong as its weakest link. Therefore, it is vital that you maintain your vehicle to factory specifications.

By installing or using the purchased product, the Consumer accepts this warranty and any specific Manufacturer warranties enclosed.

Limited Warranty

The following warranty is valid only in the United States.

The Manufacturer's full warranty applies to all products sold.

Secor Ltd. (A.W.E. Tuning) warrants to the original retail purchaser (Consumer) this product (B8 A4/A5 Exhaust) against manufacturing defects for LIFETIME.

Upon verification of warranty coverage, A.W.E. Tuning will repair or replace the defective product at their discretion, without charge. This is the only remedy the Consumer has for any loss or damage, however arising, due to nonconformity in or defect of the product. This warranty does not cover consequential damage, loss of time or revenues, inconvenience, loss of use of vehicle, damage to the vehicle or components, or other incidental or indirect damage.

All warranties are void if the product was not installed by a certified auto mechanic, improperly serviced, modified, or used in a way not intended by the Manufacturer. Use of product in Motorsports or Racing conditions is grounds for warranty denial. Motorsports and Racing is an inherently abusive operational condition, and it is impossible to warranty for this type of usage.

The Consumer is responsible for ensuring that the product is installed in a safe and proper manner, and should cease usage of the product immediately if an unsafe or improper condition is noted. If an unsafe or improper condition is noted, the Consumer should then immediately contact the facility where the product was installed or A.W.E. Tuning directly.

Please contact the original place of purchase for any warranty claims or explanations of this document.